

## Madas Gas Solenoid Valve

Our ranges of Madas gas solenoid valves are suitable for even the most strenuous of applications, all of which are tested and certified to EN161 Class A standard.

With the additional benefit of an ingress protection rating of IP65, our valves can be used in both wet and dirty environments.


All valves are fitted with an internal strainer to prevent the ingress of foreign matter.

### Technical Data:

Use: none aggressive gases  
Temp: -15 – 60°C  
Power: 230V, 24Vdc, 24 V  
Max Pressure: DN15-50: 200mbar / DN65-200: 360mbar  
Closing Time: < 1 second  
IP: IP65  
Class: DN15-50 Class A / DN200 Class B  
Group: 2



Dimensions:

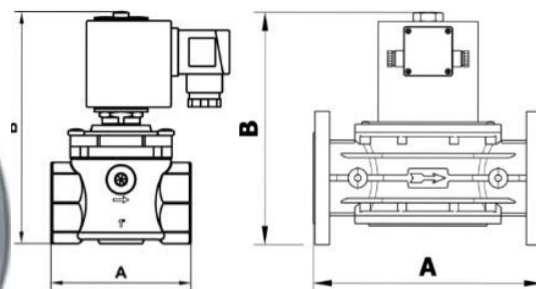

DN 15:	A: 70 mm	B: 137 mm
DN 20:	A: 70 mm	B: 137 mm
DN 25:	A: 70 mm	B: 137 mm
DN 32:	A: 160 mm	B: 185 mm
DN 40:	A: 160 mm	B: 185 mm
DN 50:	A: 160 mm	B: 210 mm
DN 65:	A: 290 mm	B: 321 mm
DN 80:	A: 310 mm	B: 328 mm
DN 100:	A: 350 mm	B: 389 mm
DN 125:	A: 480 mm	B: 570 mm
DN 150:	A: 480 mm	B: 570 mm
DN 200:	A: 600 mm	B: 680 mm

Type	Size	Inch	Connection	Max Pressure	Supply	Protection
EVO/NC10	DN10	3/8"	BSP	200	230v	IP65
EVO/NC15	DN15	1/2"	BSP	200	230V	IP65
EVP/NC20	DN20	3/4"	BSP	200	230V	IP65
EVP/NC25	DN25	1"	BSP	200	230V	IP65
EVP/NC32	DN32	1 1/4"	BSP	200	230V	IP65
EVP/NC40	DN40	1 1/2"	BSP	200	230V	IP65
EVP/NC50	DN50	2"	BSP	200	230V	IP65
EVP/NC65	DN65	2 1/2"	PN16	360	230V	IP65
EVP/NC80	DN80	3"	PN16	360	230V	IP65
EVP/NC100	DN100	4"	PN16	360	230V	IP65
EVP/NC125	DN125	5"	PN16	360	230V	IP65
EVP/NC150	DN150	6"	PN16	360	230V	IP65
EVP/NC200	DN200	8"	PN16	360	230V	IP65